



SIDE SLIDING GARAGE DOORS



www.gypass.com

TECHNICAL GUIDE

SIDE SLIDING GARAGE DOORS

RANGE « SPOSA »



DESIGN & INNOVATION

One-piece pre-frame, no mounting brackets.

Contemporary finish, white painted rail.

White painted aluminium **moulded curve**.

Length of floor guide track adapted to the door width.

Free head room: 80 mm minimum.

Sideroom on the curve side: 100 mm (for a motorised door).

Open and closed angle.

Front fix.

Full or glazed **lintel**.



SAFETY & CONVENIENCE

Complies with CE standard EN-13241-1.

Class B **fire protection**.

White painted **one-piece pre-frame and multi chambered profile**.

White painted **finger safe** hinges.

Aluminium floor profile with guide track and drainage for water discharge at the front and end.

Wicket door on the closing side or on the curve side, **up to 9 locking points**.

2 locking points on the closing side and 1 on the curve side.

The door **stops immediately** if there is an obstacle in the opening area.



PERFORMANCE & QUALITY

U Value = 0.6 K/m².

7 astragals.

Double-skinned steel panel with corrosion protection on both sides.



ECO-FRIENDLY

Solvent-free paint, 100% recyclable.

Panel with CFC-free **insulating foam**.

100% recyclable door.

40 MM PANELS

40 mm panel.

Insulation coefficient: **K = 0.6 K/m².**

Thermal insulation ★★.

Exterior 48/100 galvanised steel sheet.



Lined and embossed inside face, Stucco RAL 9010 (white).



43 mm finger safe **end cap**.

43 mm aluminium top profile.

B Fire Class.

- ① Polyester coating.
- ② Primer.
- ③ Galvanised steel.
- ④ CFC-free polyurethane foam, density: 39.5 - 40 kg /m³.
- ⑤ Galvanised steel.
- ⑥ Primer.
- ⑦ Polyester coating.
- ⑧ EPDM seal between panels.

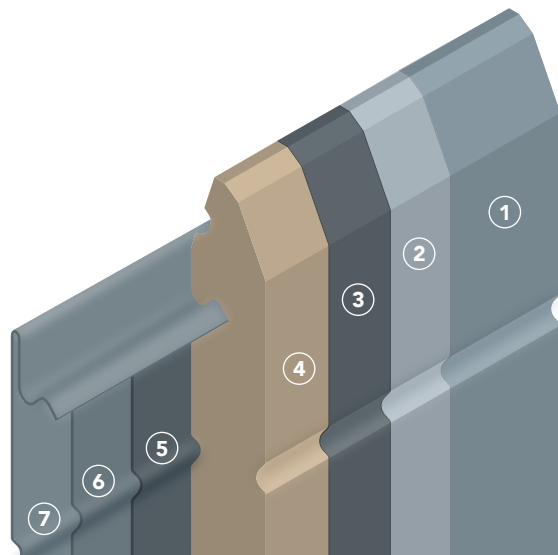

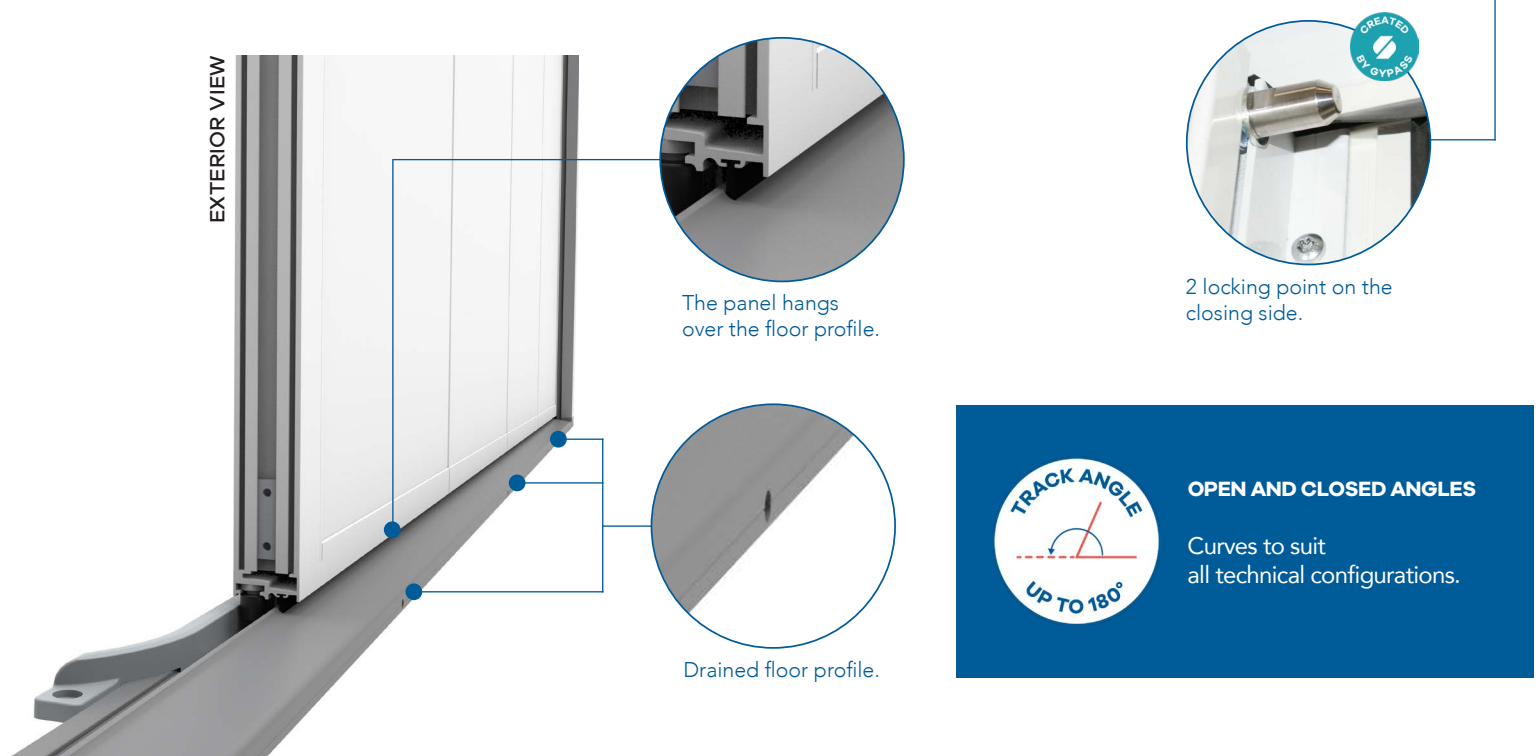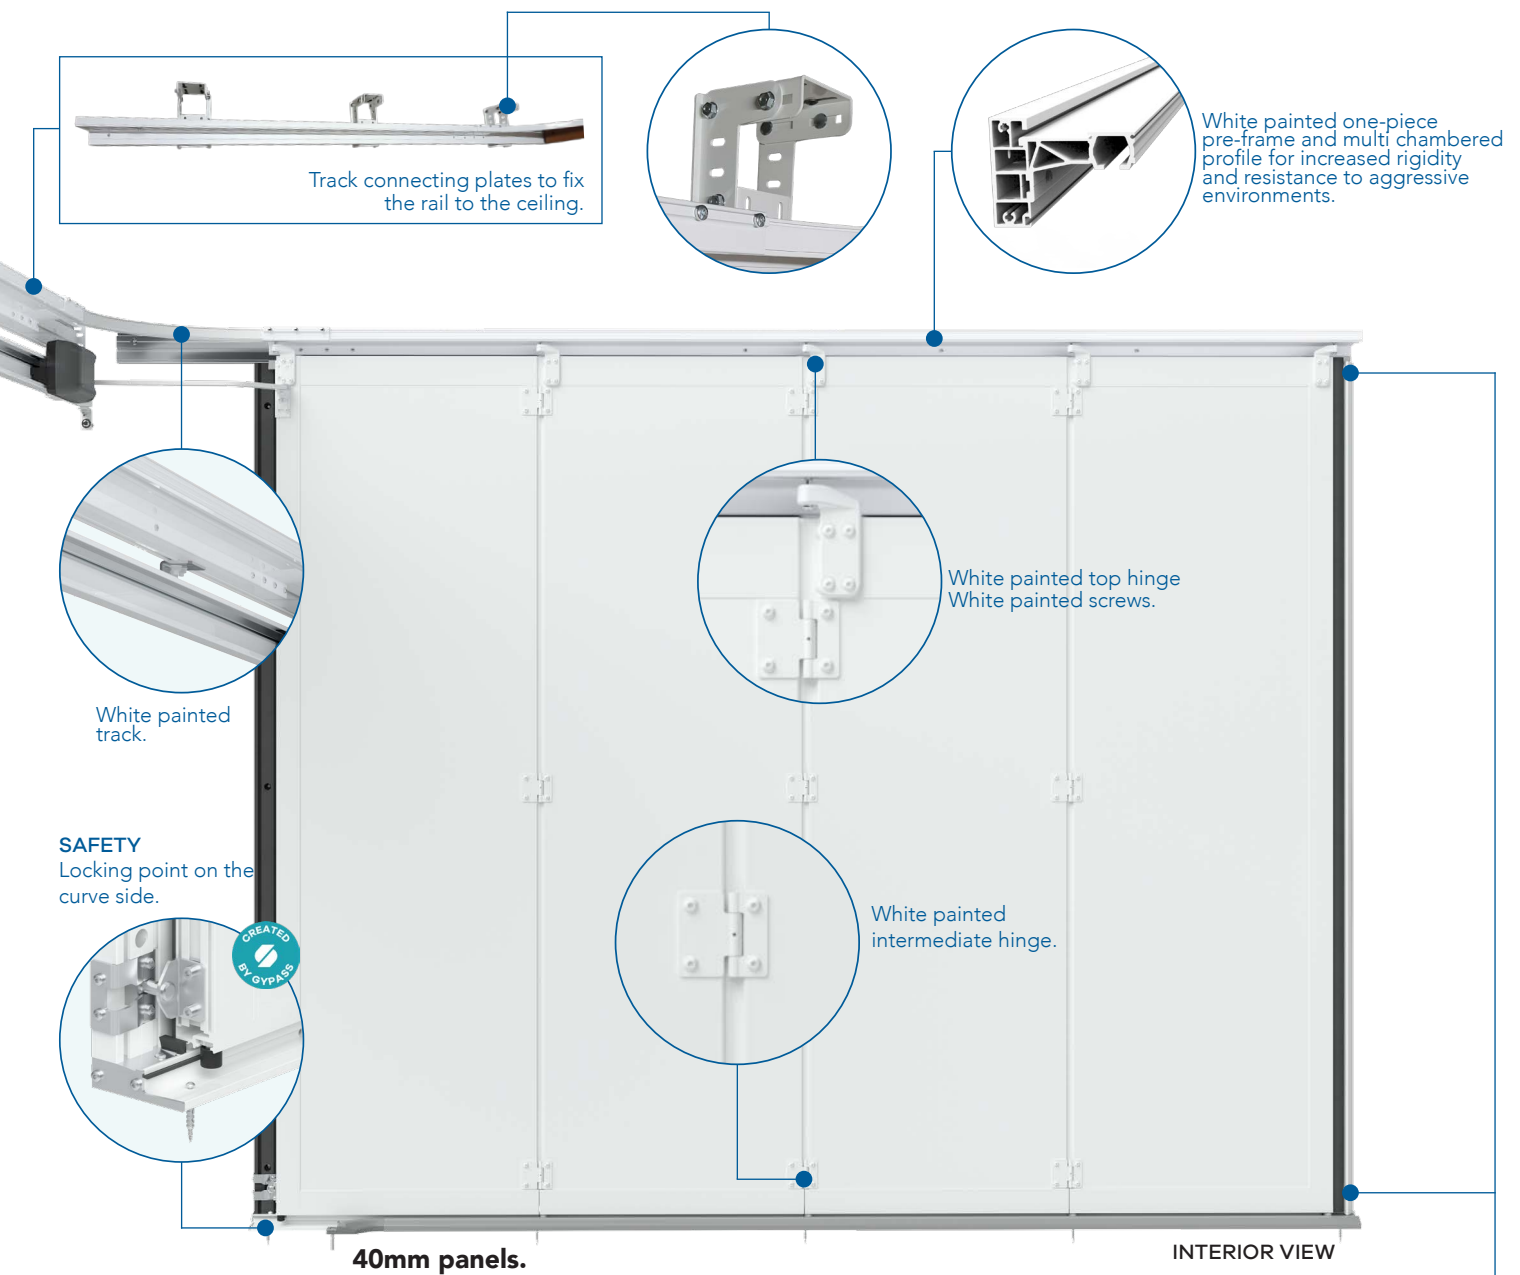

TECHNICAL GUIDE

PASS DOOR



SAFETY

5 or 9-point lock with bolts and hooks.

Extended faceplate.

Pass door **locks mechanically** as soon as the door is opened.



PERFORMANCE

Developed by our **design office**.

Manufactured in **our workshops**.

Flexible opening and closing mechanism.

Security cylinder with ownership card.



DESIGN

Flat, ergonomic exterior handle in white, grey, black or door colour.

Interior locking by **knurled knob**.

White interior finish.



PRACTICAL

Makes everyday activities easier for the whole family.

Pass door on the closing side or on the curve side.

180° pass door opening.

Pass door **stays open**.

Stainless steel **mobile strike plate** for effortless closing.

HANDLES



Ideal size for optimum grip. Flexible mechanism for efficient opening and closing. Security cylinder with key reproduction card.



WHITE HANDLE
For white doors.



GREY HANDLE
For light-coloured doors.



BLACK HANDLE
For dark-coloured doors, and lacquered in golden oak doors.




POWDER COATED IN DOOR-COLOUR HANDLE




MANUAL DOORS :
Door-coloured painted dish handle.


CHOOSE YOUR DOOR



PASS DOOR ON THE CURVE SIDE



PASS DOOR ON THE CLOSING SIDE



CHARACTERISTICS (IN MM)	NO PASS DOOR	WITH A PASS DOOR
MINIMUM WIDTH	2 250	2 250
MAXIMUM WIDTH	5 000	5 000
MINIMUM HEIGHT	1 850	1 850
MAXIMUM HEIGHT	3 000	2 500
PASS DOOR ON THE CURVE SIDE	NO	YES
PASS DOOR ON THE CLOSING SIDE	NO	YES
SAFETY	• • • •	• • • •
MANUAL OPENING	YES	YES
AUTOMATIC OPENING	YES	YES
RENOVATION / NEW BUILD	YES	YES
CAT FLAP / VENTILATION GRILLE / LETTERBOX ENTRANCE	YES	YES

COMPOSITION



A PROJECT THAT REFLECTS YOUR PERSONNALITY...



DESIGNED & MADE IN FRANCE

GYPASS has been designing and manufacturing in Normandy for over 30 years. What sets us apart is the combination of traditional know-how, cutting-edge technology and the commitment of all our employees.



CUSTOM-MADE PRODUCTS

Sloping ground, atypical dimensions, design, 38 colours, accessories, glazing... GYPASS adapts to all your requirements to design the solution that suits you best.



CERTIFIED WARRANTIES

All our products are powder coated, for perfect colour rendering and increased resistance to the test of time. Infrared powder coating process (sectional and side sliding doors).

OUR WARRANTIES

POWDER COATING (QUALICOAT SEASIDE class 2)

10-YEAR WARRANTY on smooth and woodgrain panels (> 3 km from seaside).

5-YEAR WARRANTY on smooth and woodgrain panels (≤ 3 km from seaside).

10-YEAR WARRANTY on golden oak and dark oak painting (> 3 km from seaside).

7-YEAR WARRANTY on Deep Mat 7016 and 9005 finishes (> 3 km from seaside).

5-YEAR WARRANTY on standard white woodgrain finish, smooth finish and RAL 7016 smooth PP (> 3 km from seaside).

5-YEAR WARRANTY on liquid paint lacquering on smooth and woodgrain panels (> 3 km from seaside).

FUNCTIONING

10-YEAR WARRANTY against delamination, under normal conditions of use and installation (> 3 km from seaside).

10-YEAR WARRANTY on the correct operation of the door under normal conditions of use and installation.

AUTOMATION

5-YEAR WARRANTY on operators (excluding consumables and power surges)

ACCESSORIES

2-YEAR WARRANTY (excluding consumables).



WARRANTIES SUBJECT TO : MAINTENANCE

Once a year and cleaning the door two or three times a year with clean water and neutral soap only.

(6 times a year by the sea or in aggressive environments).

 www.gypass.com

